


# Technical Data


## 性能曲线 Performance curve

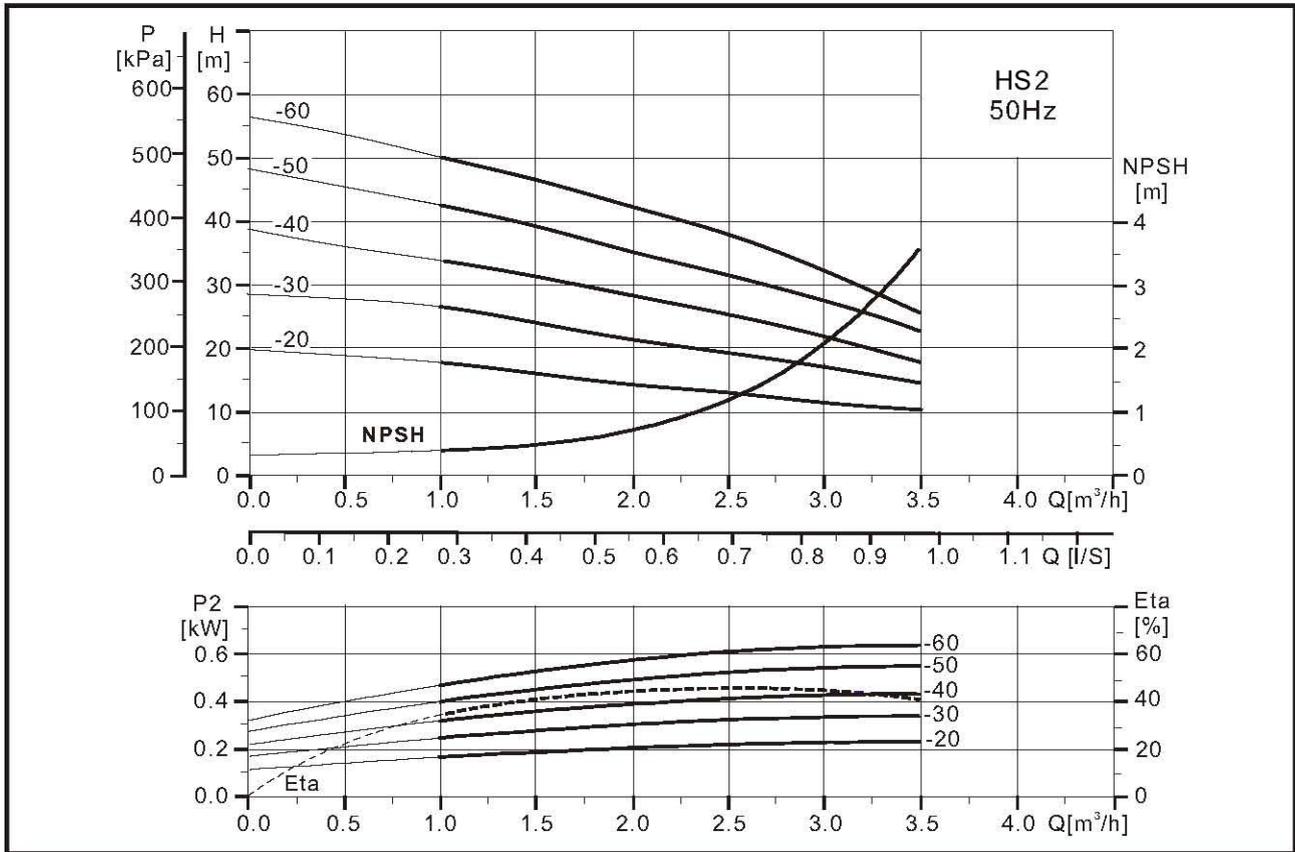

## 性能表/Performance table

泵型号 Model		配用电机 Driving motor P <sub>2</sub> (kW)	Q (m <sup>3</sup> /h)	1.0	1.5	2.0	2.5	3.0	3.5
单相 Single Phase	三相 Three Phase			H (m)					
HS2-20	HS2-20T	0.37	H (m)	18	16	14	13	11	10
HS2-30	HS2-30T	0.37		27	24	21	20	17	14
HS2-40	HS2-40T	0.55		35	32	28	26	23	17
HS2-50	HS2-50T	0.55		43	40	35	33	28	22
HS2-60	HS2-60T	0.75		50	48	42	38	32	25


## 安装图/Installation sketch

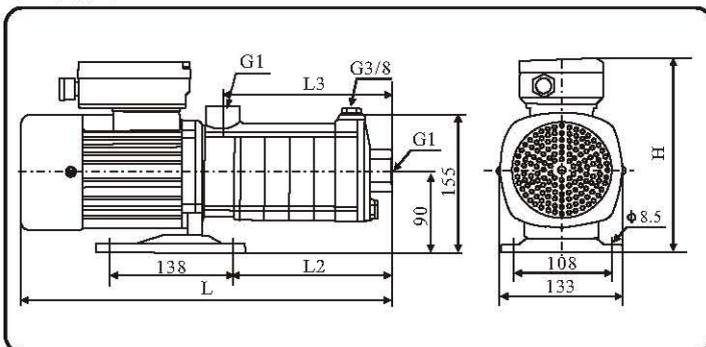

泵型号 Model	尺寸/Size(mm)								重量 Weight (kg)
	单相 Single-phase				三相 Three-phase				
	L	L2	L3	H	L	L2	L3	H	
HS2-20(T)	326	90	100	210	326	90	100	190	8.5
HS2-30(T)	344	108	118	210	344	108	118	190	9
HS2-40(T)	362	126	136	210	362	126	136	190	9.5
HS2-50(T)	380	144	154	210	380	144	154	190	9.5
HS2-60(T)	398	162	172	210	398	162	172	190	10.5

# Technical Data


## 性能曲线 Performance curve

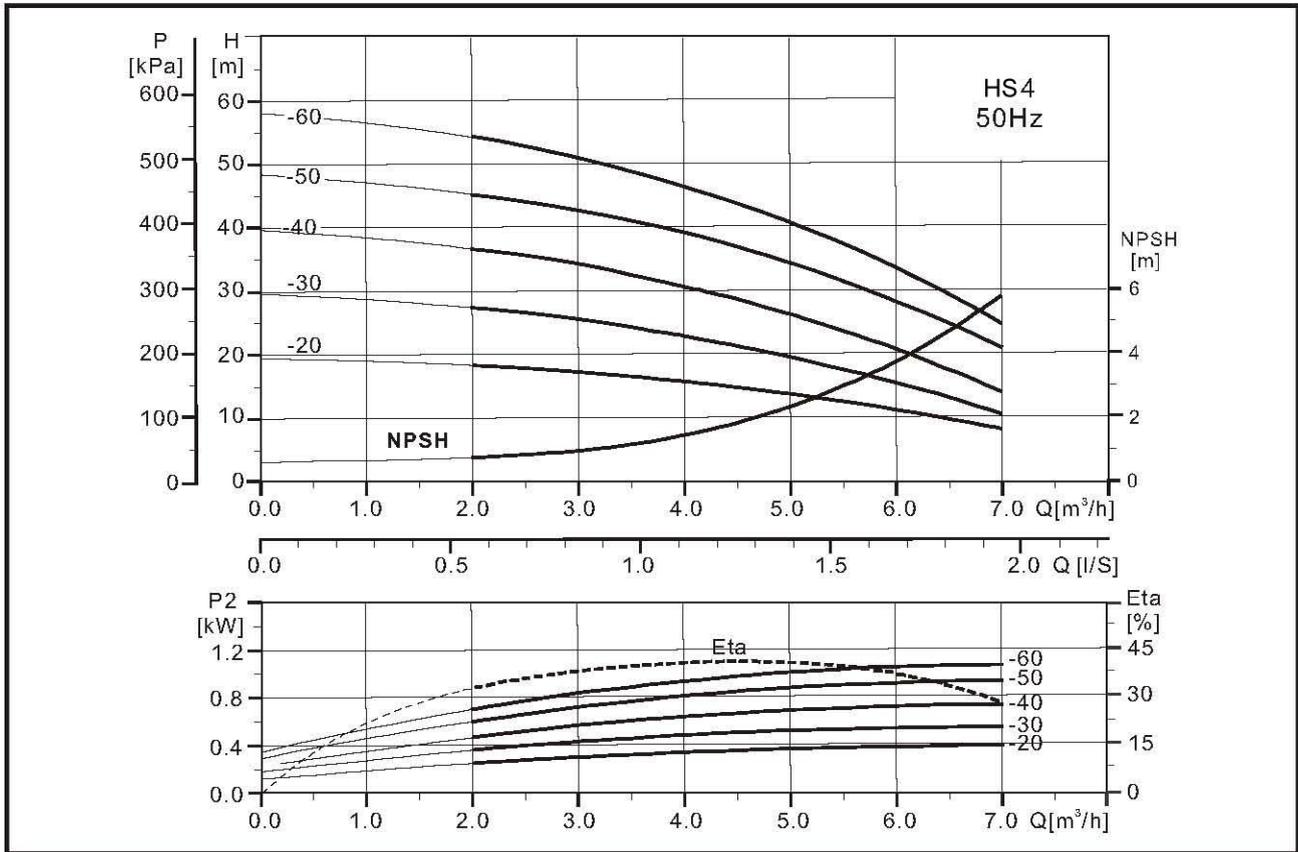

## 性能表/Performance table

泵型号 Model		配用电动机 Driving motor P <sub>2</sub> (kW)	Q (m³/h)	2.0	3.0	4.0	5.0	6.0	7.0
单相 Single Phase	三相 Three Phase								
HS4-20	HS4-20T	0.55	H (m)	18	16	15	13	10	7
HS4-30	HS4-30T	0.75		27	25	22	19	15	10
HS4-40	HS4-40T	0.75		36	33	30	26	20	14
HS4-50	HS4-50T	1.0		44	41	38	32	26	20
HS4-60	HS4-60T	1.1		53	50	45	40	33	24


## 安装图/Installation sketch

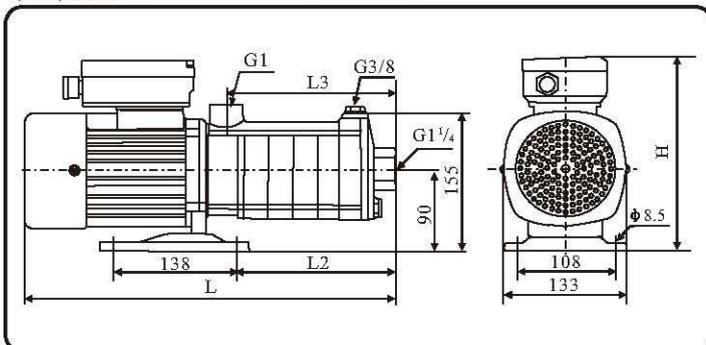

泵型号 Model	尺寸/Size(mm)								重量 Weight (kg)
	单相 Single-phase				三相 Three-phase				
	L	L2	L3	H	L	L2	L3	H	
HS4-20(T)	335	99	109	210	335	99	109	190	9
HS4-30(T)	362	126	136	210	362	126	136	190	10
HS4-40(T)	389	153	163	210	389	153	163	190	10.5
HS4-50(T)	416	180	190	210	416	180	190	190	11
HS4-60(T)	443	207	217	210	443	207	217	190	12

# 技术数据 Technical Data


## 性能曲线 Performance curve

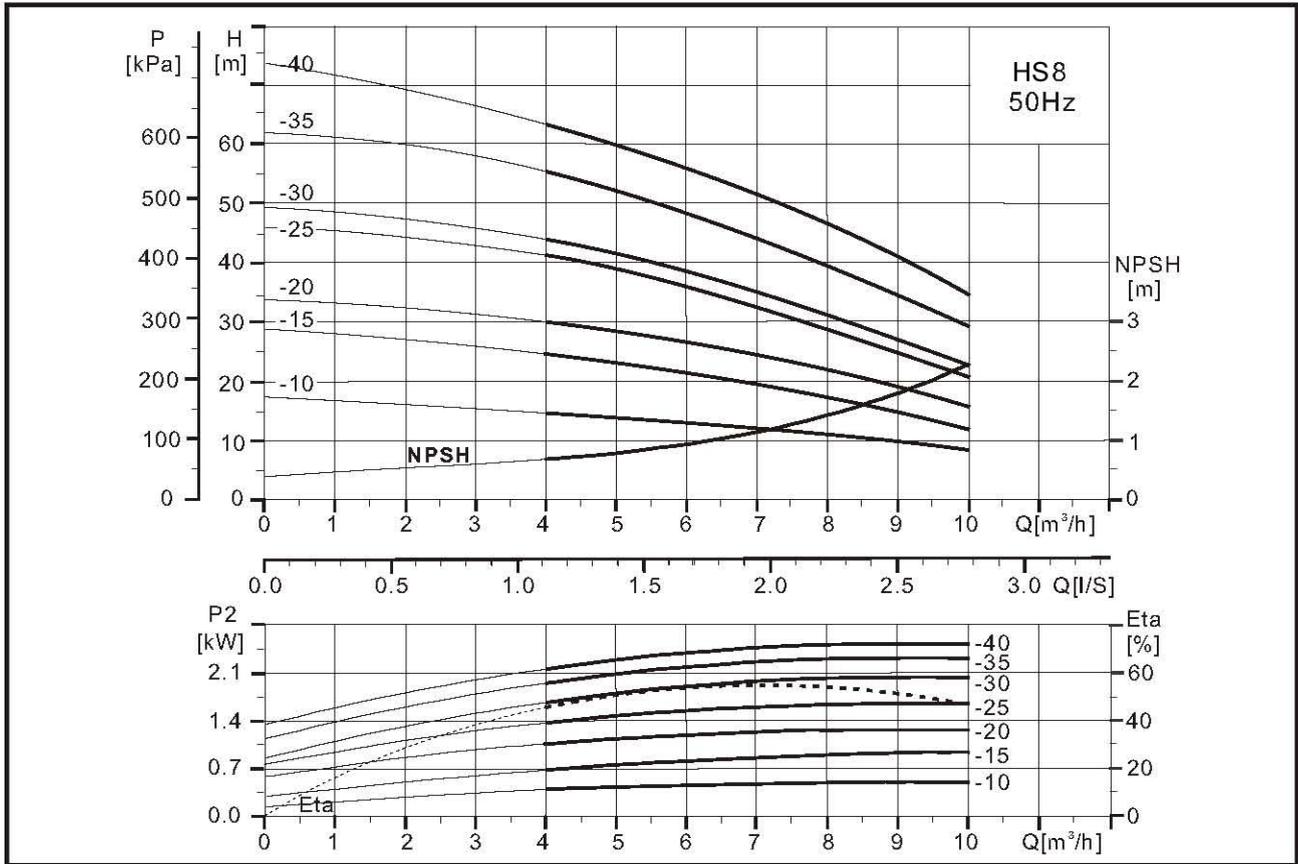

## 性能表/Performance table

泵型号 Model		配用电机 Driving motor P <sub>2</sub> (kW)	Q (m³/h)	4.0	5.0	6.0	7.0	8.0	9.0	10
单相 Single Phase	三相 Three Phase			H (m)						
HS8-10	HS8-10T	0.55	H (m)	15	14	13	12	10	9	8
HS8-15	HS8-15T	0.75		25	23	22	20	17	14	12
HS8-20	HS8-20T	1.0		30	28	26	24	20	18	16
HS8-25	HS8-25T	1.5		43	37	34	30	27	24	20
HS8-30	HS8-30T	1.85		44	42	38	36	30	27	24
HS8-35	HS8-35T	2.2		56	51	48	44	37	32	28
HS8-40	HS8-40T	2.2		65	57.5	57	50	45	40	34

## 安装图/Installation sketch

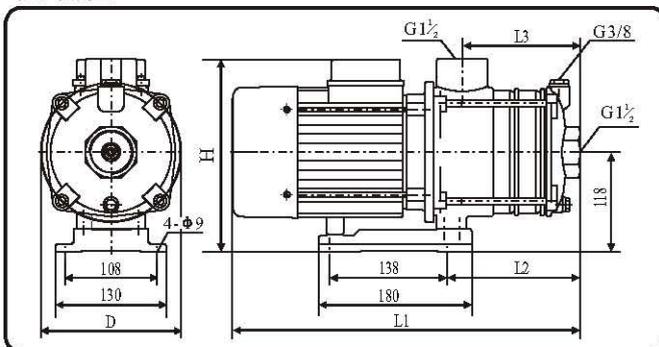


泵型号 Model	尺寸/Size(mm)										重量 Weight (kg)
	单相 Single-phase					三相 Three-phase					
	L1	L2	L3	H	D	L1	L2	L3	H	D	
HS8-10(T)	316	96	78	244	165	316	96	78	218	165	12
HS8-15(T)	346	126	108	244	165	346	126	108	218	165	14
HS8-20(T)	346	126	108	244	165	346	126	108	218	165	17
HS8-25(T)	412	156	138	254	165	412	156	138	228	165	19
HS8-30(T)	450	156	138	261	176	412	156	138	228	165	24
HS8-35(T)	480	186	168	261	176	442	186	168	228	165	25
HS8-40(T)	480	186	168	261	176	442	186	168	228	165	26

注:可按客户要求提供G2接口泵头/pump cover with G2 inlet/outlet is available

# 技术数据 Technical Data


## 性能曲线 Performance curve

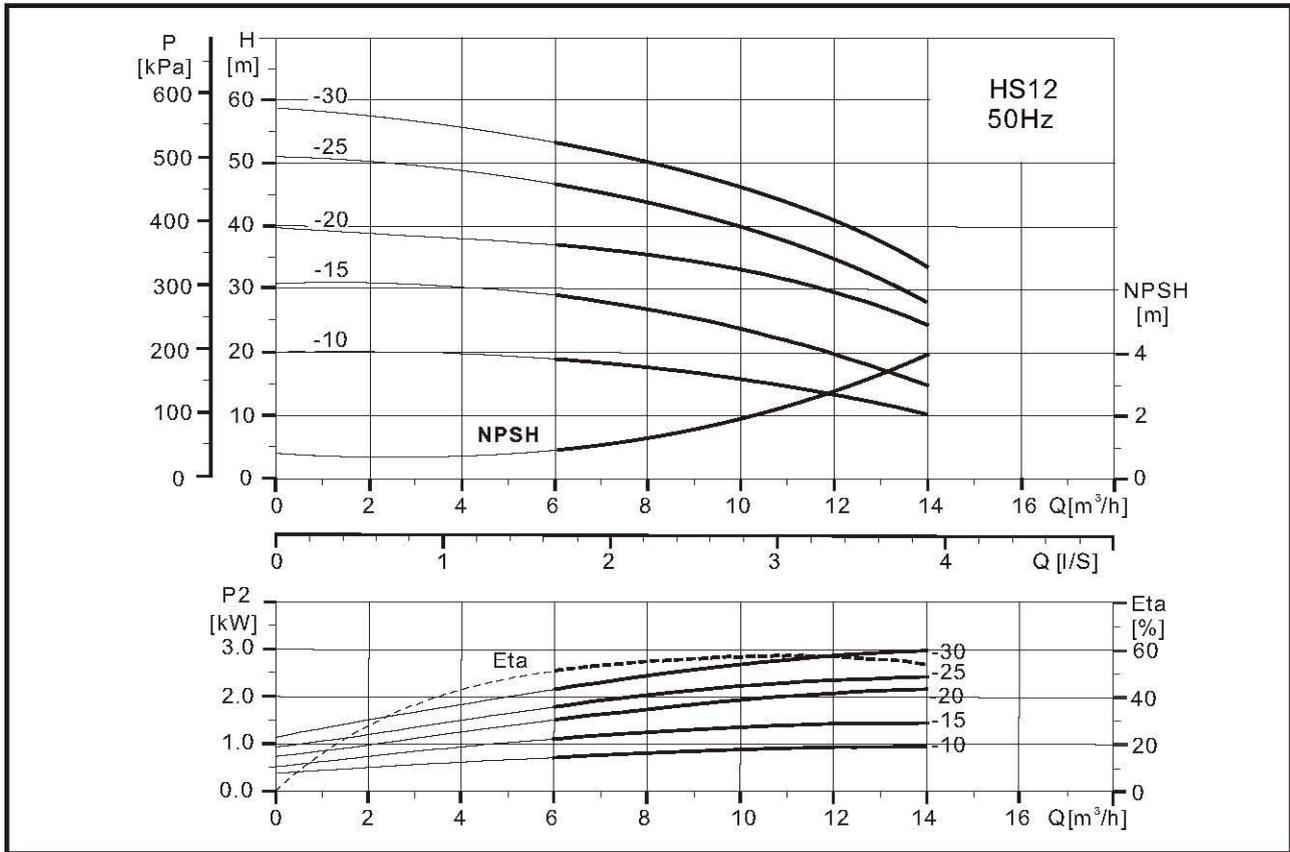

## 性能表/Performance table

泵型号 Model		配用电机 Driving motor P <sub>2</sub> (kW)	Q (m³/h)	H (m)										
单相 Single Phase	三相 Three Phase			6.0	7.0	8.0	9.0	10	11	12	13	14		
HS12-10	HS12-10T	1.0		19	18	17.5	16	15.5	14	13.5	12	10.5		
HS12-15	HS12-15T	1.5		28	27	26	25	24	22	20	18	15		
HS12-20	HS12-20T	1.85		38	36	35	32	31	29	28	24	20		
HS12-25	HS12-25T	2.2		47	45	43	41.5	39	36	33.5	30.5	27		
	HS12-30T	3.0		53.5	52	50	47.5	45	42	39	35	30		

## 安装图/Installation sketch

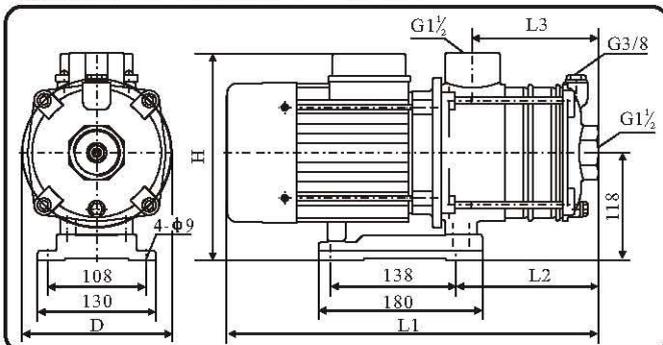


泵型号 Model	尺寸/Size(mm)										重量 Weight (kg)
	单相 Single-phase					三相 Three-phase					
	L1	L2	L3	H	D	L1	L2	L3	H	D	
HS12-10(T)	316	96	78	244	165	316	96	78	218	165	13
HS12-15(T)	412	126	108	254	165	412	126	108	228	165	15
HS12-20(T)	420	126	108	261	176	412	126	108	228	165	23
HS12-25(T)	420	156	138	261	176	412	156	138	228	165	25
HS12-30T	-	-	-	-	-	468	156	138	235	176	27

注:可按客户要求提供G2接口泵头/pump cover with G2 inlet/outlet is available

# 技术数据 Technical Data


## 性能曲线 Performance curve

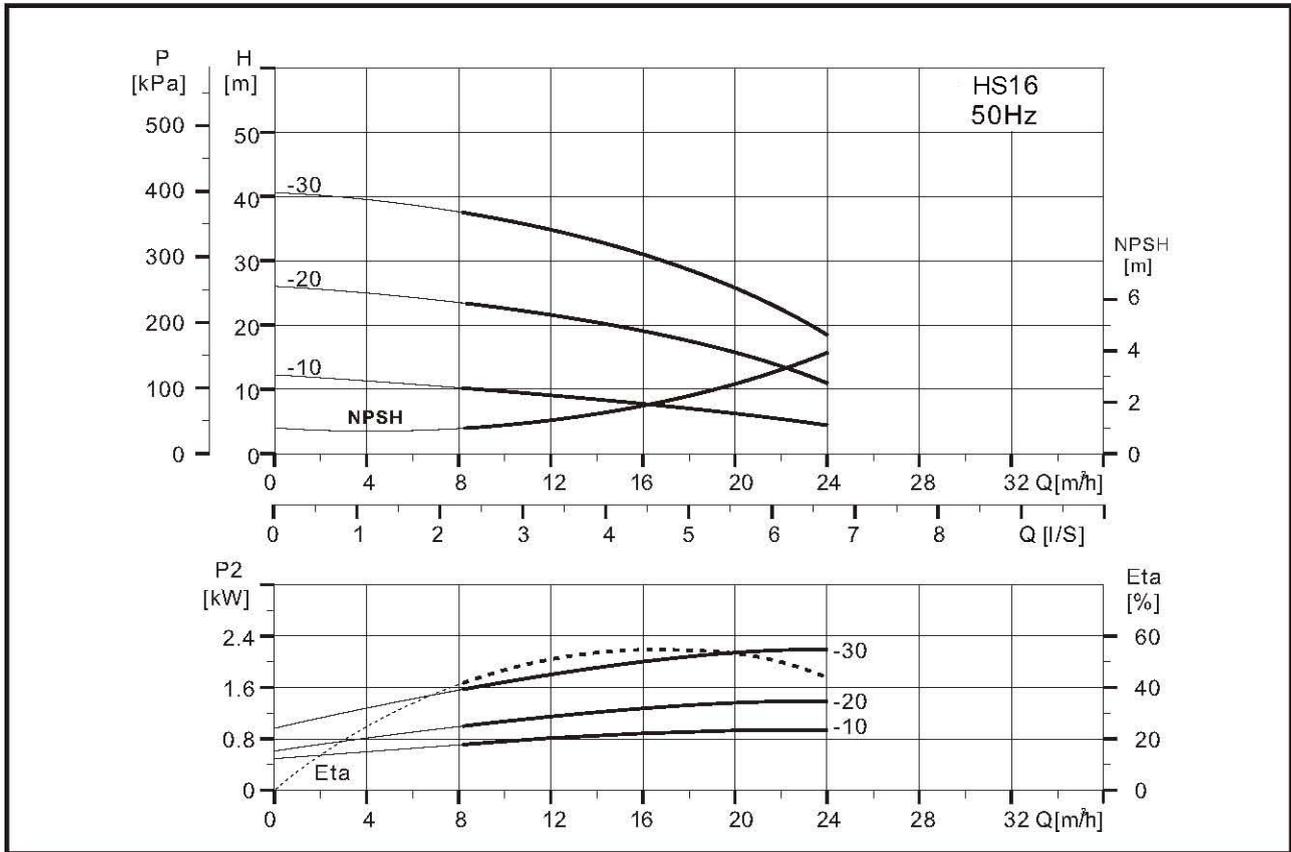

## 性能表/Performance table

泵型号 Model		配用电机 Driving motor P <sub>2</sub> (kW)	Q (m³/h)	8	10	12	14	16	18	20	22	24
单相 Single Phase	三相 Three Phase			H (m)								
HS16-10	HS16-10T	1.0	H (m)	12	11.5	11	10.5	10	9	8	7	6
HS16-20	HS16-20T	1.5		24	23	22	21	20	19	16	14	12
HS16-30	HS16-30T	2.2		38	36	34	33	30	28	26	23	20
	HS16-40T	3.0		50	48	46	44	40	38	36	32	28


## 安装图/Installation sketch

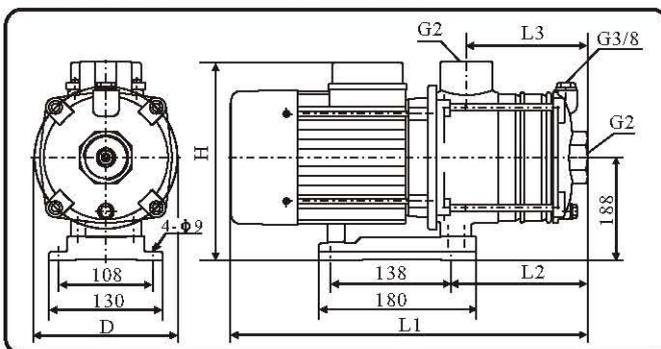

泵型号 Model	尺寸/Size(mm)										重量 Weight (kg)
	单相 Single-phase					三相 Three-phase					
	L1	L2	L3	H	D	L1	L2	L3	H	D	
HS16-10(T)	326	106	81	244	165	326	106	81	218	165	12
HS16-20(T)	406	151	126	254	165	406	151	126	228	165	18
HS16-30(T)	489	196	171	254	176	489	196	171	235	176	25
HS16-40T	552	241	216	261	176	534	241	216	235	176	28

# 技术数据 Technical Data


## 性能曲线 Performance curve

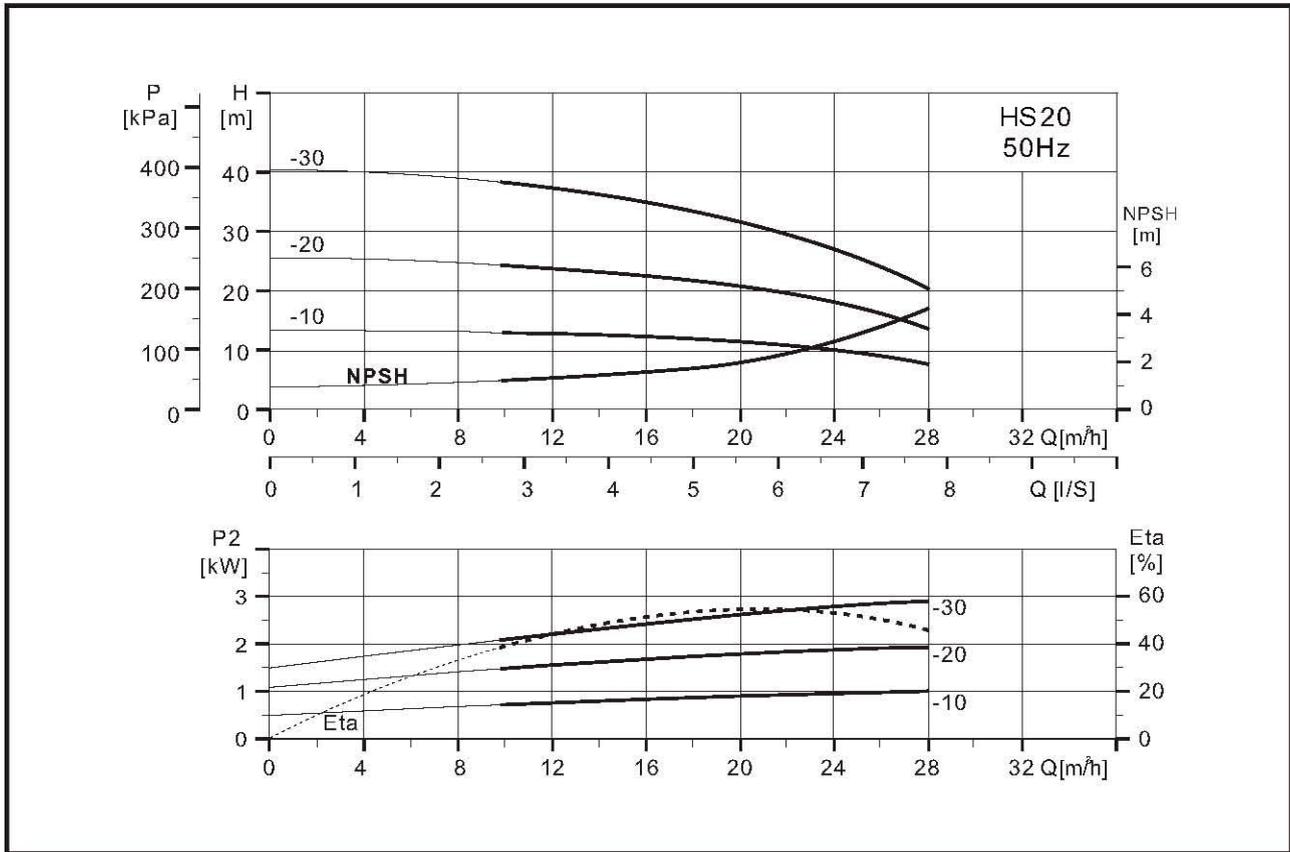

## 性能表/Performance table

泵型号 Model		配用电动机 Driving motor P <sub>2</sub> (kW)	Q (m³/h)	10	12	14	16	18	20	22	24	26	28
单相 Single Phase	三相 Three Phase			H (m)									
HS20-10	HS20-10T	1.0	H (m)	13	12.5	12	11.5	11	10.5	10	9	8.5	7.5
HS20-20	HS20-20T	1.85		25	24	23	22	21	20	18	16	14	12
	HS20-30T	3.0		39	38	36	35	33	31.5	30	27	24	21

## 安装图/Installation sketch

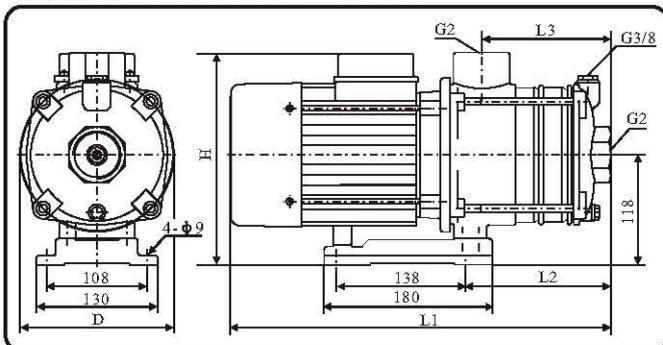

泵型号 Model	尺寸/Size(mm)										重量 Weight (kg)
	单相 Single-phase					三相 Three-phase					
	L1	L2	L3	H	D	L1	L2	L3	H	D	
HS20-10(T)	376	106	81	254	165	376	106	81	228	165	14
HS20-20(T)	444	151	126	261	176	406	151	126	228	165	24
HS20-30T	-	-	-	-	-	507	196	171	235	176	28